

STS

18&22mm TG4 Fixing Guide

NoMorePly® TG4 Fixing Guide

NoMorePly® Slow Set MegaStrength Technical Data

NoMorePly® 50mm Screw Technical Data



NoMorePly®
The Ultimate Surface


18mm STS NoMorePly® TG4 Floorboard

Key Points For Installation

- For the 18mm board the joists can be up 400mm centres.
- All joints must be staggered in a brick bond pattern.
- Slow Set MegaStrength adhesive must be used on all joints of the tongue and groove.
- Slow Set MegaStrength adhesive must be used on all areas of the timber or steel joists where they are coming into contact with a TG4 board.
- Two NoMorePly® 50mm Fibre Cement Screws per joist must be used.



SKU Code: 5518
Sheet Size: 1200x600x18mm

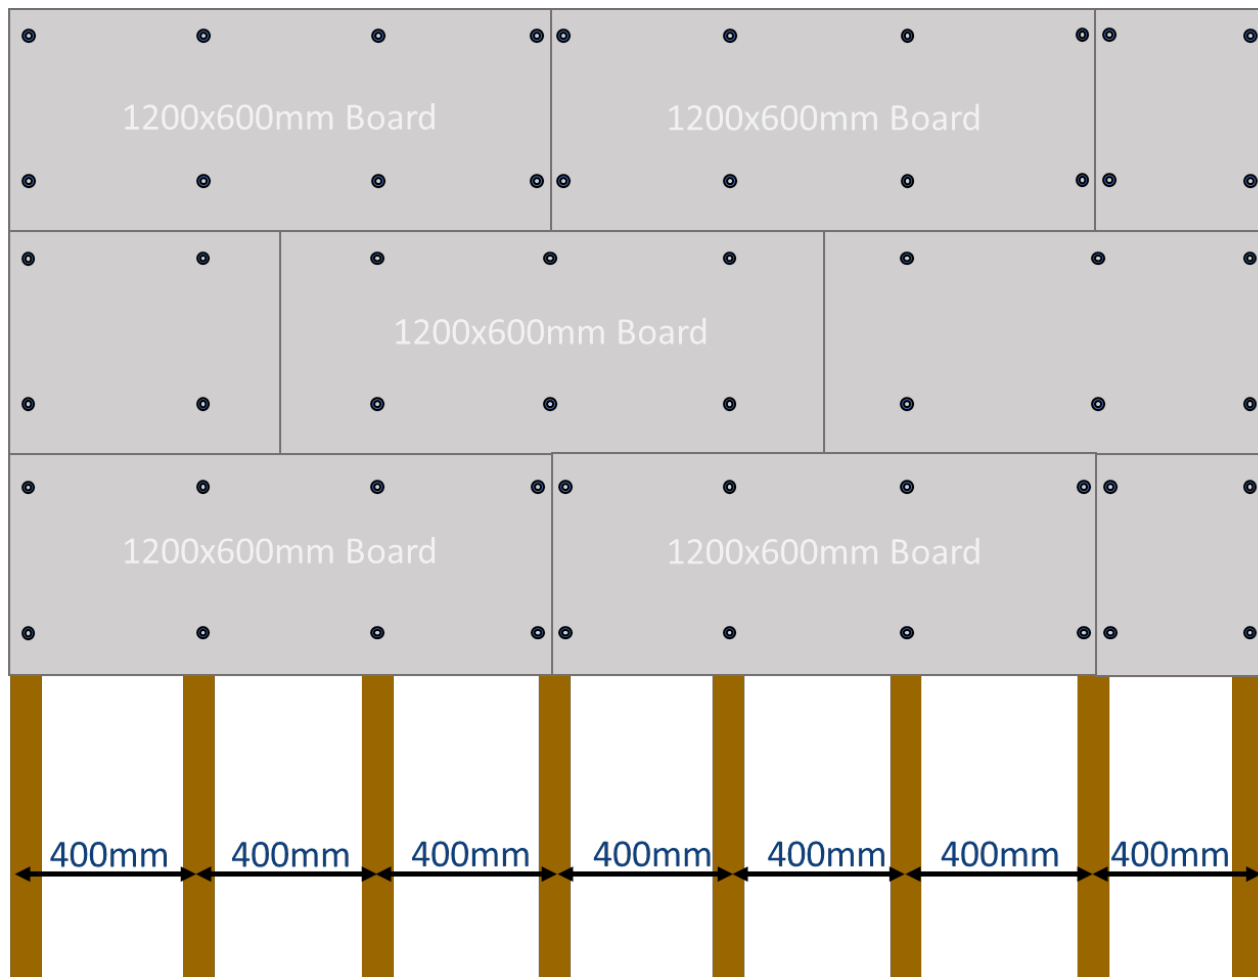


22mm STS NoMorePly® TG4 Floorboard

Key Points For Installation

- For the 22mm board the joists can be up 600mm centres.
- All joints must be staggered in a brick bond pattern.
- Slow Set MegaStrength adhesive must be used on all joints of the tongue and groove.
- Slow Set MegaStrength adhesive must be used on all areas of the timber or steel joists where they are coming into contact with a TG4 board.
- Two NoMorePly® 50mm Fibre Cement Screws per joist must be used.



SKU Code: 5522
Sheet Size: 1200x600x22mm

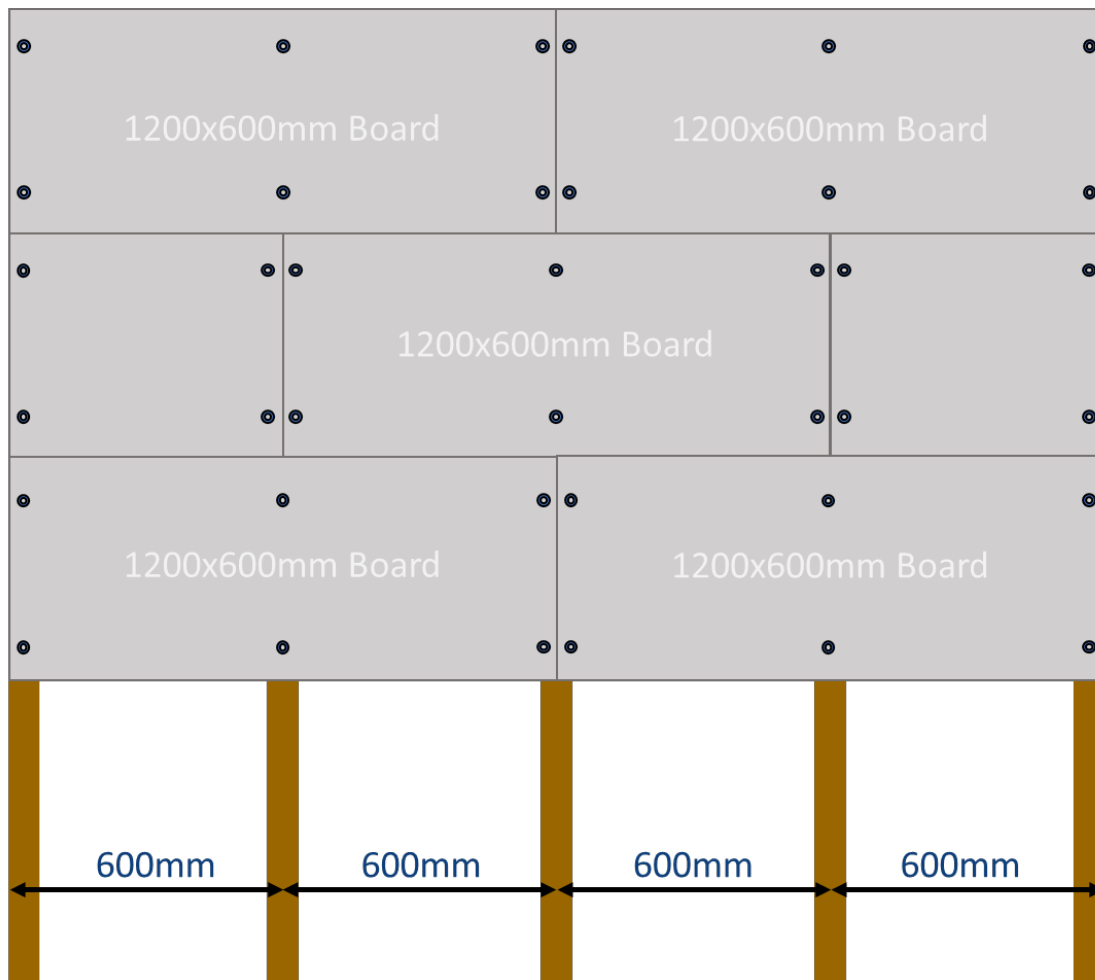

STS

NoMorePly[®] Slow Set MegaStrength Technical Data

NoMorePly[®]
The Ultimate Surface



NoMorePly® Slow Set MegaStrength PU Adhesive

Product Code: 5663

DESCRIPTION

Slow Set MegaStrength PU Adhesive is a one-component polyurethane-based moisture curing adhesive. The cured film presents a very good behavior to heat as well as a good behavior to hydrolysis. Wood to wood bonding performed with Slow Set MegaStrength PU Adhesive present an excellent water resistance (D4 classification according to EN 204 and 205 standards).

AREAS OF APPLICATIONS

Slow Set MegaStrength PU Adhesive is used for the bonding of various insulating materials (expanded or extruded polystyrene, polyurethane foam, phenolic foam, mineral wool panels) on wood, pressed wood, plaster boards, concrete or stone, and to bond wood to wood. For difficult materials like metals, polyester or PVC, it is necessary to make tests beforehand. Slow Set MegaStrength PU Adhesive must not be used in toys and childcare articles which can be placed in the mouth by children.

TECHNICAL DATA

Appearance	Thixotropic paste
Colour	Milky
Viscosity at 20°C	Brookfield RVT 7 / 5 rpm : 400,000 ± 100,000 mPa.s
Density at 20°C	1.07 ± 0.02
Skin formation time at 20°C and 65% RH	10 to 15 min
Open time at 20°C and 65% RH	10 min
Pressing time at 20°C and 65% RH	1 h
Final setting time at 20°C	24 h
Temperature resistance	-30 to +100°C



INSTRUCTIONS FOR USE

Substrates preparation:

The substrates to be bonded must be dry, dust free and not have any traces of grease or other contaminants that could harm bonding.

Note: when using solvents, extinguish all sources of ignition and carefully follow the safety and handling instructions given by the manufacturer.

Application:

Wearing of gloves is recommended. Slow Set MegaStrength PU Adhesive is to be applied in beads on one of the substrates to be bonded by a gun or deposited with a toothed spatula. Distribute evenly over the entire surface and press to ensure a perfect contact between substrate and adhesive. Exert the maximum possible pressure without deforming the material in an irreversible way. One of the substrates to be bonded must be porous or contain moisture. If both substrates are non-porous, it is imperative to spray a light water mist on the adhesive (10 to 15 g on 100g adhesive) before pressing. The setting time depends on hygrometry and temperature.

It is therefore imperative:

- in case of working under 20°C: to ensure that pressing time is sufficient;
- in case of working over 20°C: to ensure that open time and closed assembly time are not excessive.

Otherwise, defective bonding could happen.

NOTE: These products foam slightly on application to fill small gaps. Any excess foam/adhesive must be removed with acetone before the product sets or with a sharp chisel once set.

CONSUMPTION

150 to 250 g/m² depending on application method and materials to be bonded.



STORAGE AND SHELF LIFE

12 months in closed original packaging stored at a temperature between 5 and 25°C. In cold weather, store the packaging at about 20°C before use.

Keep out of reach of children.

SAFETY

Read material safety data sheet before use.

The technical data contained herein is based on our present knowledge and experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technological changes or research between the date of issue of this document and the date the product is acquired.

Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.



STS

NoMorePly[®] 50mm Screw Technical Data



NoMorePly[®]
The Ultimate Surface

Technical Data Sheet

NoMorePly® 50mm Fibre Cement Flooring Screw

Product Overview

The NoMorePly® 50mm Fibre Cement Flooring Screw is a high-performance screw designed specifically for use with our 18&22mm STS NoMorePly TG4 Floorboard System. They are also great for use with any other fibre cement sheet material.

When installing our 18&22mm STS NoMorePly TG4 Floorboard System, it is important to ensure the screws used are flush, strong, and suitable for moisture, impact and as they are on a floor it is important that the thread holds tight in every joist and board.

Product Name: NoMorePly® 50mm Fibre Cement Flooring Screw

STS Product SKU: 5650

Box Quantity: 250

Product Image



Screw Dimensions & Material Type

Screw Size	Total Length	Head Style	Head Mark	Drive Type	Recess Depth	Head Diameter	Major Diameter (Threads)	Minor Diameter (Shank)	Drilling Width
50mm	50mm	Flat	-	Phillips	2.80mm	6mm	3.9mm	2.68mm (approx.)	3.50mm

